
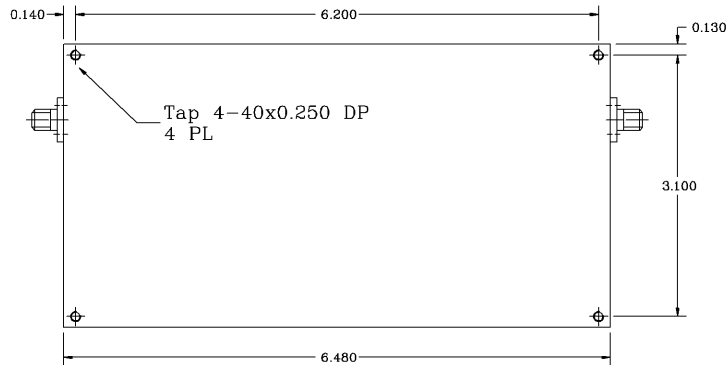
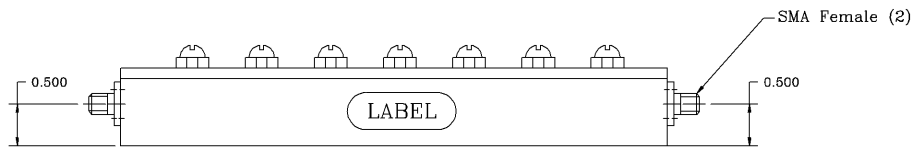
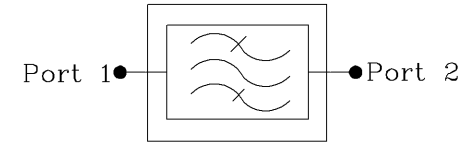


REVISIONS			
REV		DATE	APPROVED

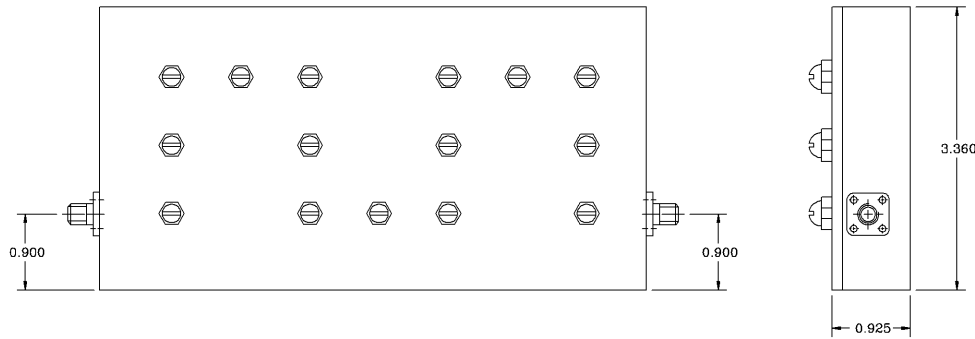

Electrical Specifications

- *1dB Pass Band Frequency Range [MHz] : 2483.5 to 2493.5
- *Insertion Loss @ Fo [dB] : <1.8, 1.6 (Typ.)
- *Pass Band Ripple [dB] : <0.5 P-T-P
- *Attenuation @ +/- 9 MHz from Fo [dB] : 50 (Min.), 55 (Typ.)
- *Pass Band Return Loss [dB] : -18 (Max.), <1.3:1
- *Input/Output Impedance : 50 ohm
- *RF Power Capability CW : 20 Watts
- *Input/Output @ DC Ground Potential

OPERATING TEMPERATURE RANGE: -20°C TO +65°C

NOTES:

1. BREAK ALL CORNERS & EDGES.005/.010.
2. FINAL FINISH:
EPOXY GRAY - OPTIONAL

PROPRIETARY DOCUMENT:
THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION. THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

DIMENSIONS ARE IN INCHES TOLERANCES ARE		CONTRACT NO:		G-Way Microwave			
ANGLES	DECIMALS	APPROVALS	DATE				
± 1°	X ± .05 XX ± .01 XXX ± .003	DRAWN Segal	06/08	CB2488.5/10SK-D		REV.	
TREATMENT	CHECKED			SIZE	CAGE CODE	DWG NO:	
FINISH 63/	ENG.			A	3K1H4	CB2488.5/10SK-D-1	0
MATERIAL AL6061-T6	DESIGN ACTIVITY			SCALE	None		SHEET 1 OF 1

CB2488.5/105K-D

