
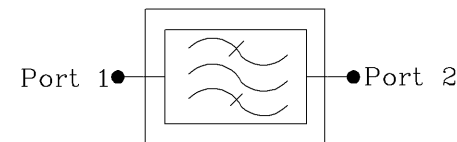
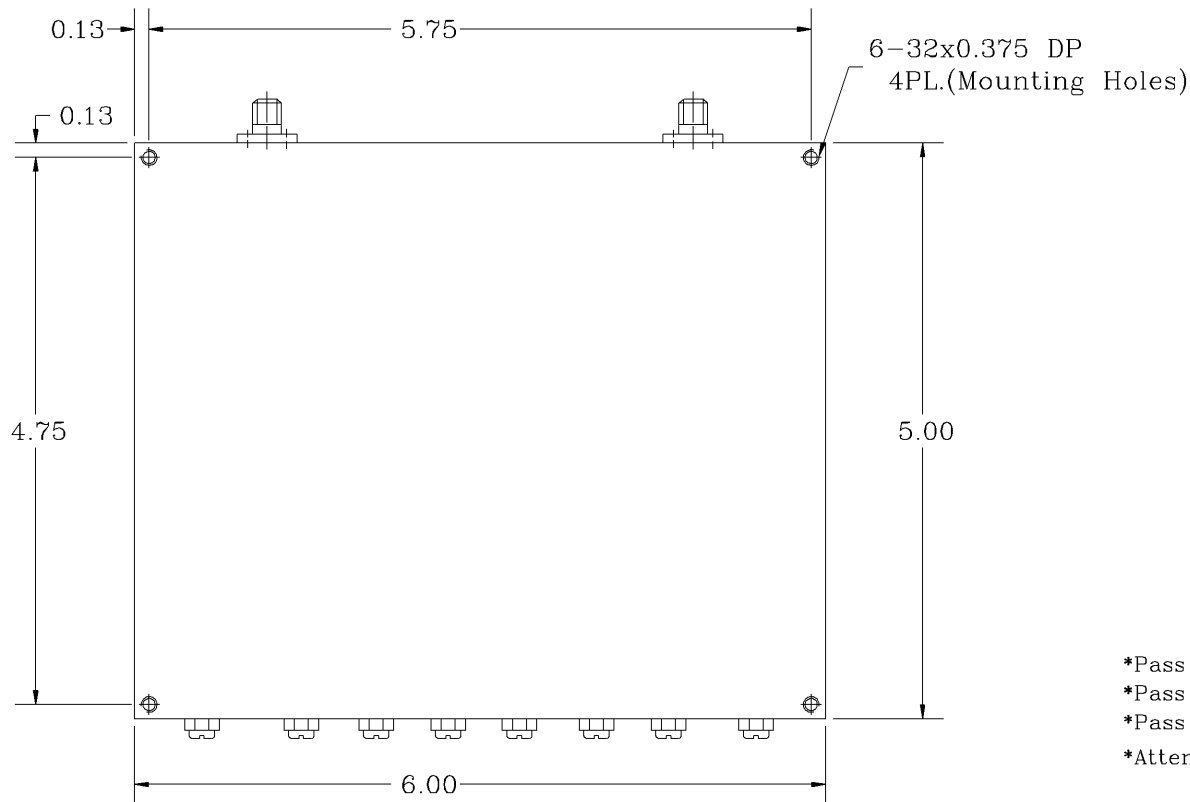


REVISIONS			
REV		DATE	APPROVED

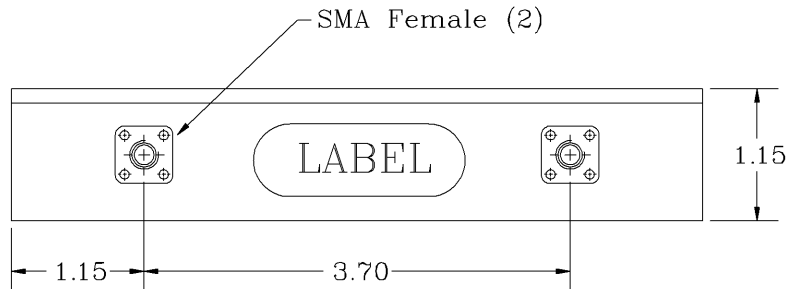

Electrical Specifications

- *Pass Band Frequency Range [MHz] : 400 to 410
- *Pass Band Insertion Loss Including Ripple [dB] : <1.0
- *Pass Band Ripple [dB] : <0.4 P-T-P
- *Attenuation DC to 100 MHz [dB] : 70 (Min.)
- 420 to 450 MHz [dB] : 70 (Min.)
- 450 to 1330 MHz [dB] : 70 (Min.)
- *Pass Band Return Loss [dB] : -18 (Max.), <1.28:1
- *Input/Output Impedance : 50 ohm
- *RF Power Capability CW : 5 Watts
- *Input/Output @ DC Ground Potential

OPERATING TEMPERATURE RANGE: -10°C TO +65°C

PROPRIETARY DOCUMENT:
 THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION. THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

NOTES:

1. BREAK ALL CORNERS & EDGES.005/.010.
2. FINAL FINISH:
EPOXY GRAY - OPTIONAL

DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CONTRACT NO:		G-Way Microwave			
ANGLES	DECIMALS	APPROVALS	DATE				
± 1°	X ± .05 XX ± .01 XXX ± .003	DRAWN Sivak	12/06	Band Pass UHF		REV.	
TREATMENT	CHECKED			CB405/10SK-F1			
FINISH 63/	ENG.			SIZE	CAGE CODE	DWG NO:	
	DESIGN ACTIVITY			A	3K1H4	CB405/10SK-F1-1	0
MATERIAL AL6061-T6				SCALE	None		SHEET 1 OF 1

CB405/105K-F1

