



REVISIONS			
REV		DATE	APPROVED

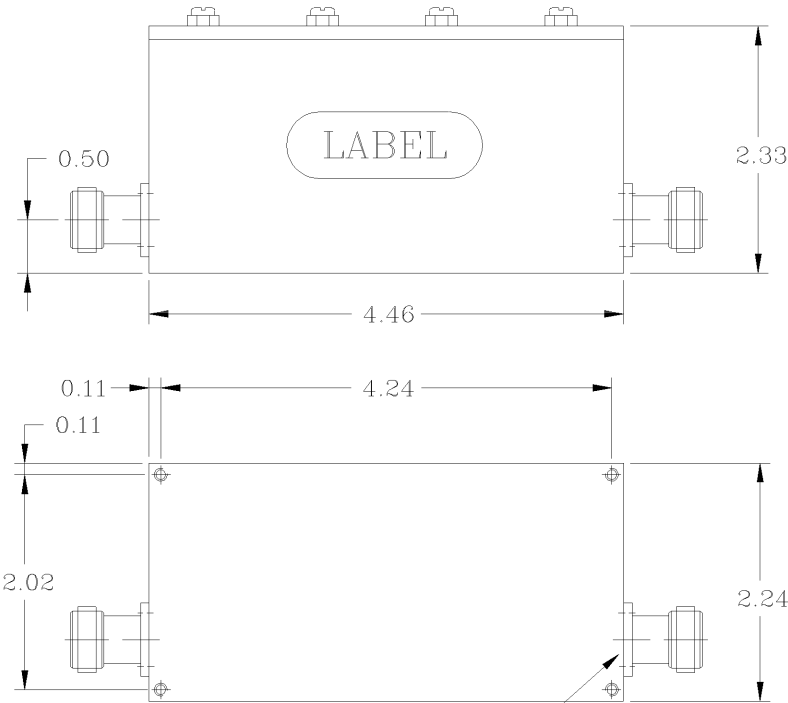

Tap 4-40x0.30 DP
4 PL

N-Type Female (2)

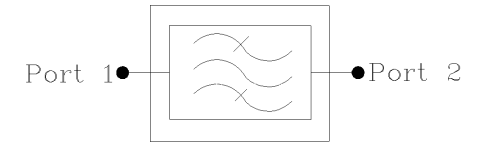

Electrical Specifications

- *1.5dB Pass Band Frequency Range [MHz] : 776 to 787
- *Pass Band Insertion Loss @ Fo [dB] : < 1.1, 0.8 (Typ.)
- *Pass Band Ripple [dB] : < 0.5 P-T-P
- *Attenuation @ 774 & 789 MHz [dB] : 25 (Min.), 28 (Typ.)
- *Ultimate Stop Band Attenuation [dB] : 90 (Min)
- *Pass Band Return Loss [dB] : -18 (Max.)
- *Input/Output Impedance : 50 ohm
- *Input/Output @ DC Ground Potential
- *RF Power Capability Average : 10 Watts

OPERATING TEMPERATURE RANGE: -20°C TO +50°C

PROPRIETARY DOCUMENT:
THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION. THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

NOTES:

1. BREAK ALL CORNERS & EDGES.005/.010.
2. FINAL FINISH:
EPOXY GRAY - OPTIONAL

DIMENSIONS ARE IN INCHES TOLERANCES ARE		CONTRACT NO:		G-Way Microwave	
ANGLES	DECIMALS	APPROVALS	DATE		
± 1°	.X ± .05 .XX ± .01 .XXX ± .003	DRAWN Sivak	04/13	Band Pass Filter CB781.5/11SK-B2N	
TREATMENT	CHECKED	ENG.		SIZE	CAGE CODE
FINISH 63/		DESIGN ACTIVITY		A	3K1H4
MATERIAL				DWG NO:	REV.
				CB781.5/11SK-B2N-1	0
				SCALE None	SHEET 1 OF 1

CB 781.5/115K-B2N

