

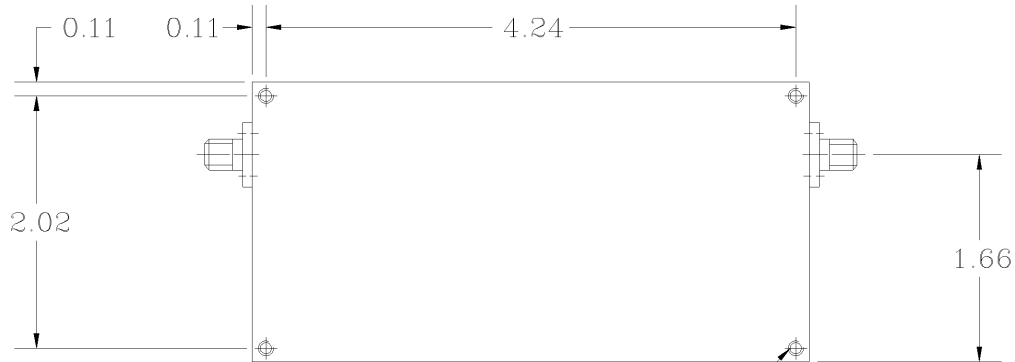
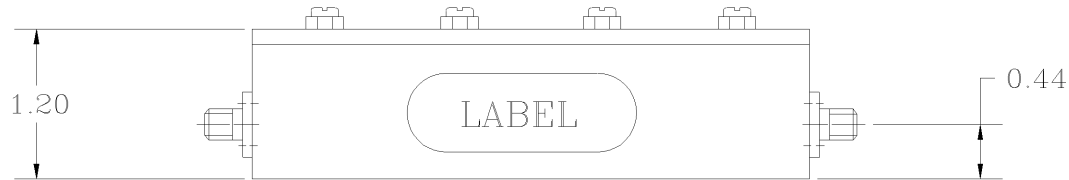


REVISIONS			
REV		DATE	APPROVED

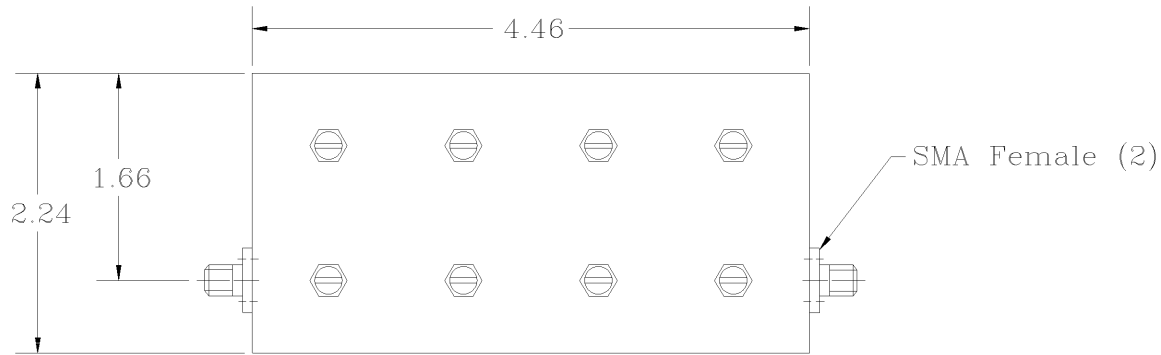

Tap 4-40x0.25 DP
4 PL

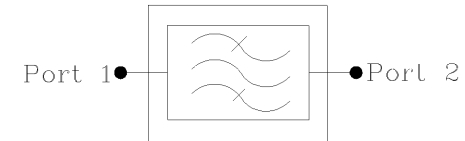

Electrical Specifications

- *1dB Pass Band Range [MHz] : 1609.5 to 1624.5
- *Insertion Loss @ Fo [dB] : <1.5 (Min.), 1.2 (Typ.)
- *Pass Band Ripple [dB] : <0.5 P-T-P
- *Rejection @ 1575 MHz [dBc] : 70 (Min.), 75 (Typ.)
- *Pass Band Return Loss [dB] : -18 (Max.)
- *Input/Output Impedance : 50 ohm
- *RF Power Capability CW : 2 Watts
- *Input/Output @ DC Ground Potential

OPERATING TEMPERATURE RANGE: -20°C TO +50°C

PROPRIETARY DOCUMENT:
THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION. THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

NOTES:

1. BREAK ALL CORNERS & EDGES.005/.010.
2. FINAL FINISH:
EPOXY GRAY - OPTIONAL

DIMENSIONS ARE IN INCHES		CONTRACT NO:		G-Way Microwave	
TOLEANCES ARE		APPROVALS			
ANGLES	DECIMALS		DATE	Band Pass Filter	
± 1°	.X ± .05 .XX ± .01 .XXX ± .003	DRAWN	01/14	CB1617/15SK-B2	
TREATMENT	CHECKED			SIZE	CAGE CODE
FINISH	ENG.			A	3K1H4
MATERIAL	DESIGN ACTIVITY			DWG NO:	REV.
AL6061-T6				CB1617/15SK-B2-1	0
SCALE None				SHEET 1 OF 1	

CB 1612/15 SK-BQ

