



The MP941/35/54HK-A4 is suitable for single and multi carrier applications in 925-960 MHz band high power linear applications. The amplifier employs linear LD MOS power devices that provide significant linear output power, wide dynamic range, and high gain.



### Model: MP941/35/54HK-A4

#### 1. Electrical Characteristics

Item	Value	Note
Frequency Range	925 ~ 960 MHz	
Gain	58 ± 1 dB	
Gain Flatness	± 0.5 dB	Over Freq. Range
Gain Variation	± 1.0 dB	Over Temp. Range
Power Output P1	+54 dBm (Min.)	
Power Output Psat	+55 dBm (Min.)	
Output IP3	+69 dBm (Min.)	2 Tones @ +47.0 dBm/tone, 1 MHz spacing
ACLR @ +53.5 dBm	- 30 dBc @ ± 200 KHz offset from F0 (Max.) (RBW = 30 kHz)	<u>Signal Source:</u>  1 GSM
	-60 dBc @ ± 400 KHz offset from the F0 (Max.) (RBW = 30 kHz)	
ACLR @ +50.5 dBm	- 30 dBc @ ± 5 MHz offset from F0 (Max.) (RBW = 30 kHz)	<u>Signal Source:</u> 1 WCDMA 64 DPCH PAR=7.5 dB @ 0.01% Probability on CCDF
	-45dBc @ ±10 MHz offset from the F0 (Max.) (RBW = 30 kHz)	
ACLR @ +47.5 dBm	- 30 dBc @ ± 5 MHz offset from F0 (Max.) (RBW = 30 kHz)	<u>Signal Source:</u> 1FA 10MHz LTE PAR=9.6 dB @ 0.01% Probability on CCDF
	-45dBc @ ±10 MHz offset from the F0 (Max.) (RBW = 30 kHz)	
Input / Output VSWR	≤ 1.2	
VVA Control Range	> 25 dB	Voltage Input 0-5V
VVA Control Voltage	+5V: Maxim Gain 0V: Minimum Gain	
Over Temperature Protection	Shutdown @ +85°C ± 5°C	Auto Recover @ +75°C ± 5°C
HPA Enable/Disable	TTL "Low or Open" ⇒ Enable TTL "High" ⇒ Disable	
Input Power Monitor	2.4 ± 0.1V @ +20.0 dBm	RMS Detection
Forward Power Monitor	2.4 ± 0.1V @ +53.5 dBm	RMS Detection
Reverse Power Monitor	2.4 ± 0.1V @ +53.5 dBm	RMS Detection
Power Monitor Flatness over frequency range	±0.2 dBm (Max.)	
Spurious	-70 dBc (Max.)	
Harmonics @ +53 dBm	-40 dBc (Max.)	
DC Input Voltage / Current	+28 VDC ± 1V / 26.0A (Max.)	DC Input Voltage / Current @ +54.0 dBm
Input / Output Impedance	50 Ω	
Input Max	+20 dBm	
Reverse Power Max.	+53 dBm	

#### Revision History

REV	Reason to Change	Date	Initialed by
	Initial release	09/02/16	Y.Z.

#### 2. Mechanical Characteristics

Monitoring Connector	D7W2 Male	4 – 40 screw
RF IN/OUT Connector	SMA/ N-Type 4 Holes Female	
DC Input	Pin 6,7 on DB-9	
Dimensions	8.0" x 6.98" x 1.07"	
Weight	3.3 lb	


#### 3. Environmental Characteristics

Operating Temperature	-20°C ~ +75°C	Base Plate
Storage Temperature	-40°C ~ +95°C	
Cooling	External Heatsink	
Humidity (Non-condensing)	95% (Max.)	Designed to meet: IAW MIL-STD-810F

#### 4. D7W2 Male Pin Description

1	Forward Power Monitor	
2	Reverse Power Monitor	
3	Input Power Monitor	
4	VVA Control	0-5V
5	Enable / Disable	Enable: TTL Low or Open Disable: TTL High
A1	+28VDC	
A2	GND	

#### 5. Outline Drawing

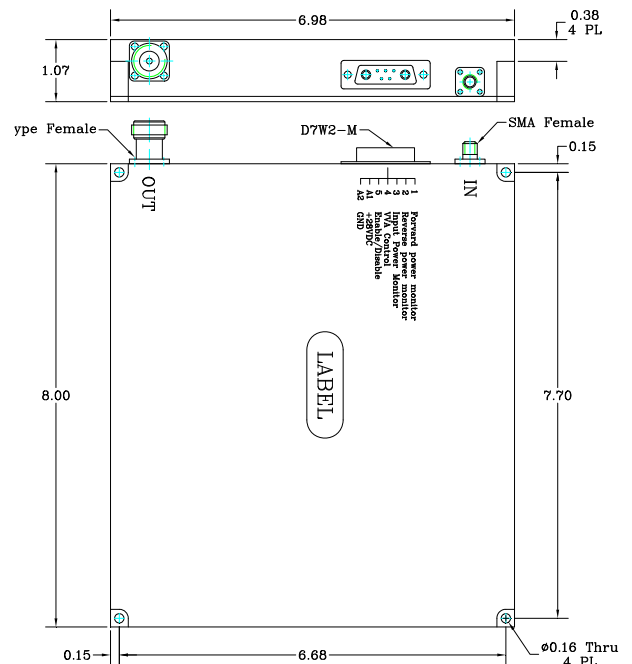



INNOVATIVE SOLUTIONS FOR MICROWAVE/RF COMPONENTS